


TECHNICAL SUMMARY

- 39.2° F to 50° F / 4° C to 10° C
- Fluorescent lamp with electronic ballast.
- 339.5 lbs / 154 kg
- 1,526.69 liters / 18.60 ft³
- 420 cans of 12 oz / 355 ml.
- 21 equipment (container of 40)
25 equipment (box of 48)



- Compressor: 1/5 HP
- Voltage: 110V ± 10%
- Shelves: 3 shelves.
- Interior: Pre - painted white steel interior
- Exterior: Pre - painted black and white steel exterior
- Insulator: Injected polyurethane foam, 100% eco-friendly
- Door: Sliding curtain
- Base: Galvanized structure. Rear castors for easy movement. Front bumper shock protector

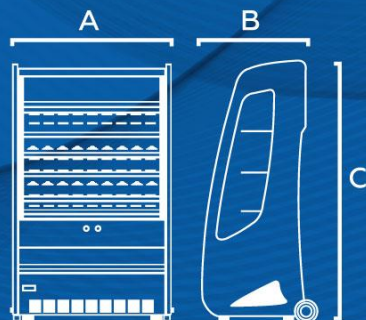

DIMENSIONS	EXTERIOR	INTERIOR
(A) WIDTH	950 mm	517 mm
(B) DEPTH	890 mm	492 mm
(C) HEIGHT	2040 mm	1254 mm