


**FORTE 112**



**TECHNICAL SPECS**

- 32° F to 44.6° F / 0° C to 7° C
- 3.45 kWh / 24 hr
- LED perimetral lighting
- 166.44 lbs / 75.5 kg
- 319 liters / 12 ft<sup>3</sup>
- 255 bottles of 10.14 oz / 330 ml  
156 bottles of 16.9 oz / 500 ml
- 197 cans of 22.9 oz / 680 ml  
336 cans of 12 oz / 355 ml
- 54 units 40' container  
63 units 48' box

- Compressor:** Last generation
- Fan motor:** Shaded pole \*Optional electronic of high efficiency
- Controller:** Electronic controller with energy saving mode
- Voltage:** 110V ± 10%
- Shelves:** 4 shelves
- Interior:** Stainless steel 304
- Exterior:** Stainless steel T-430
- Insulator:** Polyurethane with cyclopentane gas as foaming agent, 100% CFC-free and non-toxic
- Door:** Duo-vent tempered glass door 0.11 in / 3mm thick and steel frame. Welded corners. Handle embedded in the door. Magnetic PVC gasket. Stainless steel T-430 hinges. Available in solid door version.
- Base:** Galvanized sheet structure, skid rail in high density PE , stainless steel T-430 Louver

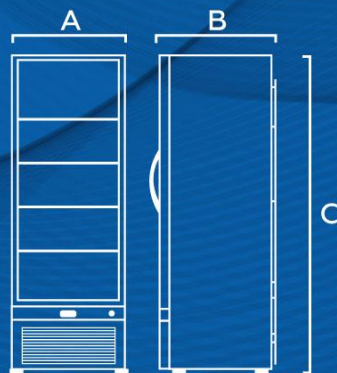

DIMENSIONS	EXTERIOR	INTERIOR
(A) WIDTH	629 mm	517 mm
(B) DEPTH	678 mm	492 mm
(C) HEIGHT	1707 mm	1254 mm